

# GD2606-TX / GD3206-TX

Industrial Dye Sublimation Printer (With 6 Heads)




Grando Sublimation Ink



\* 3.2m Six I3200 Print Heads Speed

360x1200dpi - 1pass	320 m <sup>2</sup> /h
360x2400dpi - 2pass	160 m <sup>2</sup> /h
720x1800dpi - 3pass	105 m <sup>2</sup> /h

Six I3200 Heads  
CMYK

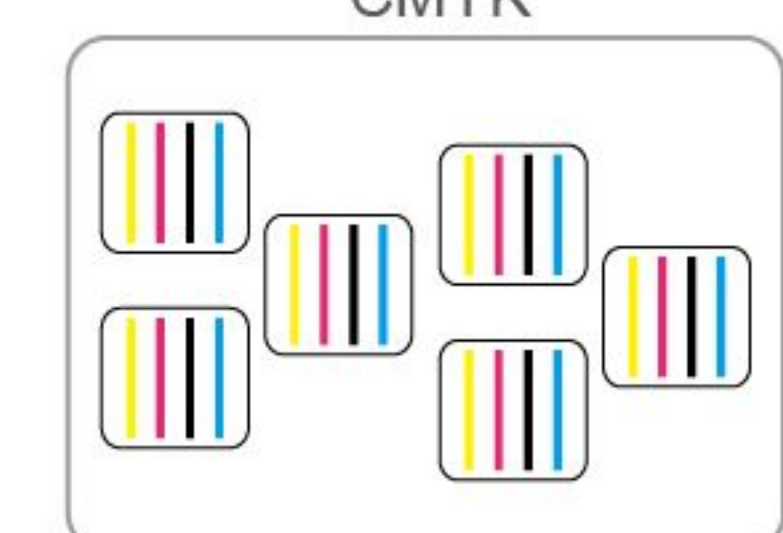


Wide applications in clothing, home decoration fabrics, sampling, shrit, canvas bags, bolster, scooter, flags, textile gadgets etc.



## ● Technical Specifications (2.6m/3.2m optional)


Model	GD2606-TX(I3200)	GD3206-TX(I3200)
Print Head	Six I3200 Print Heads	Six I3200 Print Heads
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	103 in.(2620 mm)
	Thickness	Maximum 39 mil(1 mm)
	Weight	220 lb.(100 kg)
Printing Width	102 in.(2600 mm)	125.9 in.(3200 mm)
Ink Cartridges	Type	Dye Sublimation Ink
	Capacity	4*4 CISS (220ml ink cartridge with 3L ink tank)
	Color	4 colors (Cyan, Magenta, Yellow, Black),8 colors optional
Printing Resolution	Maximum 2400 dpi	
Printing Speed	1pass(360x1200dpi):	296 sqm/h
	2pass(360x2400dpi):	160 sqm/h
	3pass(720x1800dpi):	105 sqm/h
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system	
Interface	USB 3.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	158.8(W)x48(D)x73.2(H) in.	167.7(W)x43.3(D)x62.2(H) in.
	(4035(W)x1220(D)x1860(H) mm )	(4620(W)x1100(D)x1580(H) mm )
Weight(with stand)	1320 lb. (600 kg)	1984 lb. (900 kg)
Package Dimensions	167.7(W)x56.8(D)x92.9(H) in.	185.8(W)x47.2(D)x66.1(H) in.
	( 4260(W)x1445(D)x2360(H) mm )	(4720(W)x1200(D)x1680(H) mm )
Package Weight	1980 lb. (900 kg)	2094 lb. (950 kg)
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	

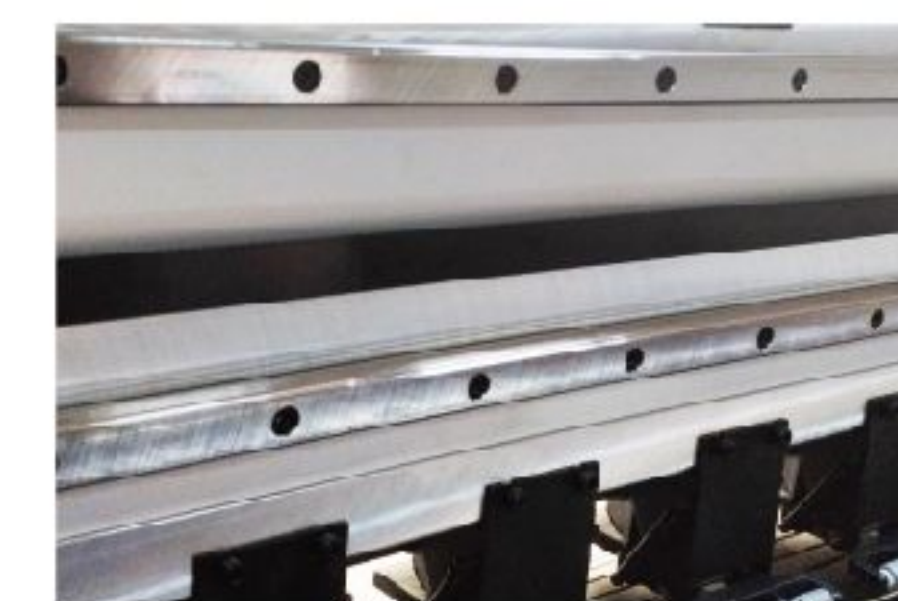


Double high-precision mute rail.



Stable 3L bulk system ensures amazing printing speed.

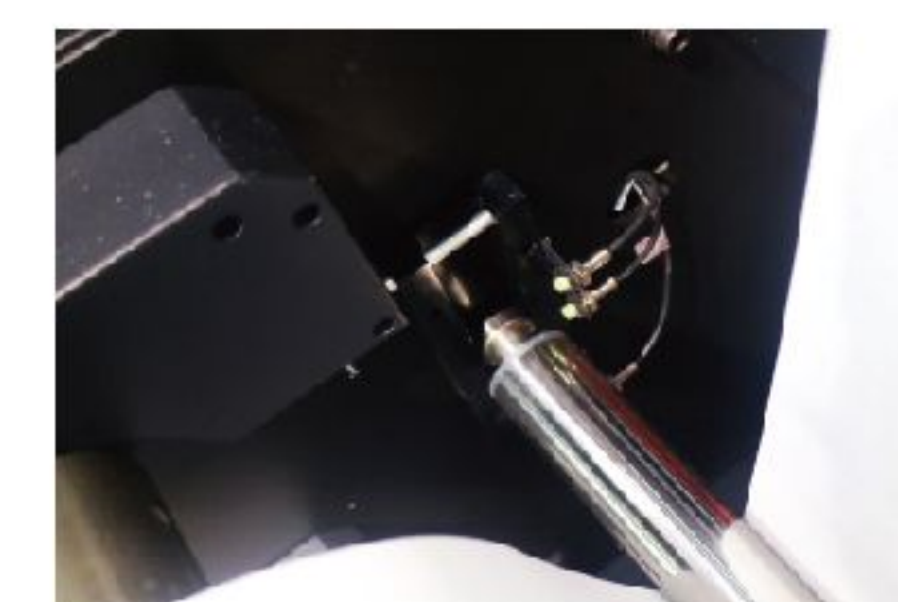

Media retraction tension bar.

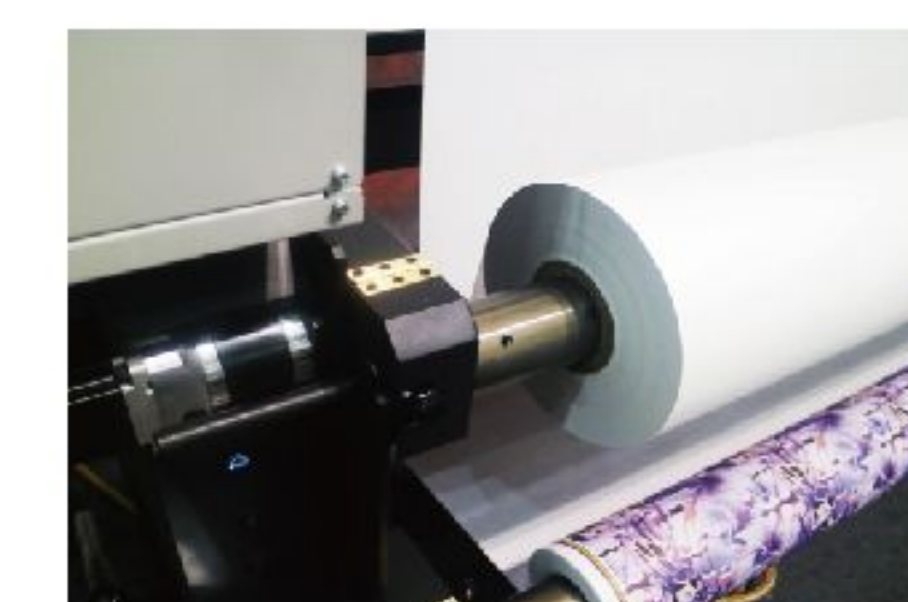

Junbo media roll maximum 1000m media load.



Inflatable take up and feed media shaft.



Integrated IR & cooling fan system.



Front expander



Rear media balance bar